

RECESSED GRID CEILING MOUNT w/ OPEN HOUSING AR111

Catalog # _____

Type _____

Project _____

DESCRIPTION:

An adjustable AR111 fixture suitable for multiple downlighting applications with one point of electrical entry. For use in lay-in t-bar grid style ceilings. Powder coat finish on housing & lamp assembly.

CONSTRUCTION:

Housing Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture utilizes specially developed retaining clips for snap-in mounting directly to t-bar supports. Tabs on housing top accommodate above ceiling aircraft cable support for added stability.

LAMP ASSEMBLY:

Two AR111 lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking lamp adjustment. Provides 45° visual cut-off.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.




ELECTRICAL:

Integral electronic transformers. Fused and short circuit protection. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Transformers and electrical wiring accessible through ceiling opening.


ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



COMBOLIGHT® GR Series
TWO (2) Light Recessed
Multi-Lamp Luminaire
for Lay-in, T-Bar Grid Style Ceiling
Open Housing Aperture
Low Voltage AR111

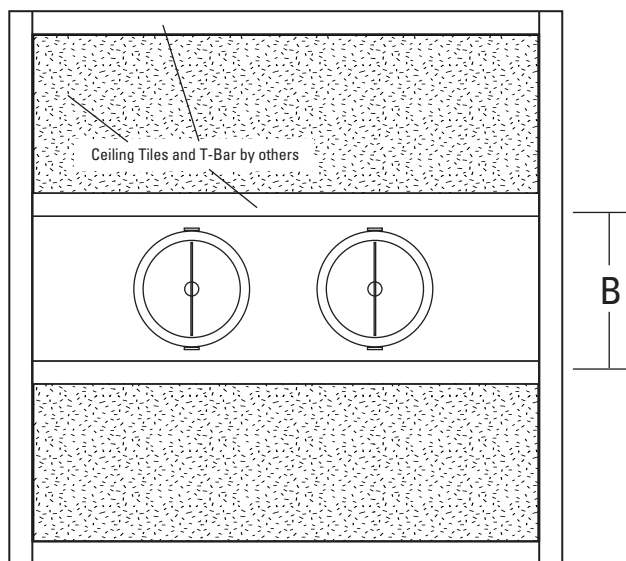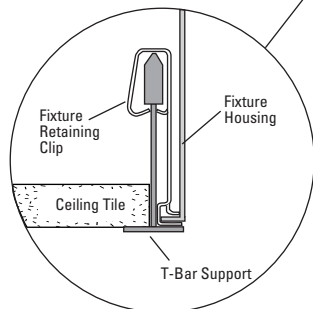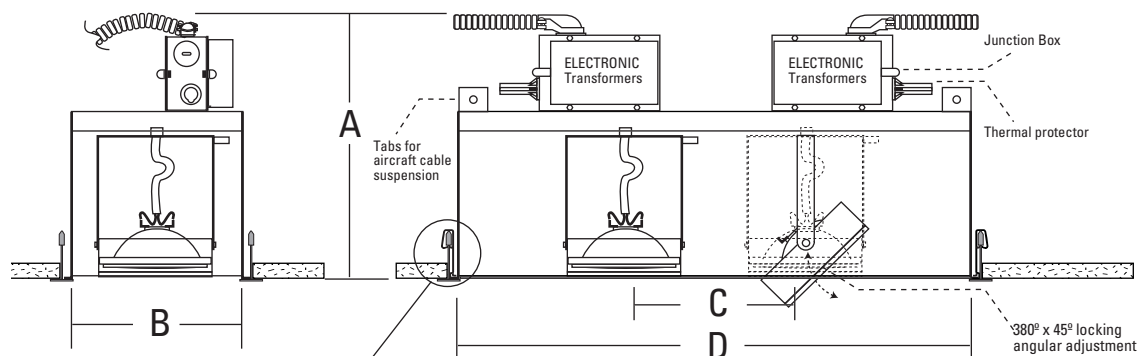

Optional Accessories - Details on Other Side



Other Adders:
CC - Two Circuit

ORDERING EXAMPLE: GR2111 50 BK YK 120

= Two Light Recessed Combo for Grid Style Ceiling (Open Housing Aperture) - AR111 50W - Black Interior Finish - Regular Yoke Lamp Holder - 120 Volt

A	B	C	D
Overall Height	Overall Width	Lamp Spacing	Overall Length
11.97"	8.01"	7.75"	23.44"



Cat. # / Description	Lamp Wattage	Interior Finish	Lamp Holder	Voltage
GR2111 - 2 Light Recessed Combo for Lay-in Grid Style Ceilings 12V AR111	35 - 35 Watt 12 Volt AR111	BK - Black	YK - Regular Yoke (Standard)	120 - 120 Volt
	50 - 50 Watt 12 Volt AR111	WH - White	RT - Retractable Yoke	277 - 277 Volt
	75 - 75 Watt 12 Volt AR111	S - Silver		
	100 - 100 Watt 12 Volt AR111	PT - Custom		

SPECIFY -

GR2111

RSA LIGHTING®

RSA LIGHTING LLC 9660 - 9700 TOPANGA CANYON BLVD. CHATSWORTH CA. 91311
TOLL FREE: 800-356-3030 • 818-349-3030 • FAX: 818-349-3031 • www.rsalighting.com
©2003 RSA Lighting LLC All Rights Reserved • Specifications subject to change without notice.